


GENIECLIP[®] LB3

RESILIENT SOUND ISOLATION BRACKET



PATENTS: US 7,895,803 US 9,121,469 CA 2,552,516 AU 2,007,276,677 CN 101,631,919 EPO Patent Pending SG 149,449

PRODUCT SPECIFICATION

PRODUCT NAME: GenieClip LB3

DESCRIPTION: Unibody molded rubber and steel part with extended bracket used when superior sound control is required in multifamily housing, high-rises, or commercial buildings.

APPLICATION: Resilient sound isolation clip with extended steel bracket used as a stand-alone system or in conjunction with a **GenieClip** wall or ceiling system to extend or reduce the profile space between the gypsum board layer and floor joists or wall studs and provide support at the wall termination of furring channels.

FEATURES AND BENEFITS:

- Significantly improves low and high frequency sound control performance
- Substantially reduces impact noise in floor-ceiling assemblies
- Allow for thinner and even no resilient mat used in certain floor-ceiling assemblies
- Qualifies for LEED[®] points

DIMENSION: 4" length, 2" width, 2 5/8" height (nom. 102 mm length, 51 mm width, 67 mm height)

BRACKET WEIGHT: 0.37 lb (166 grams)

BRACKETS/BOX: 25

LEAD TIME: 2-3 weeks after receipt of order

TECHNICAL DATA

TENSILE STRENGTH (ASTM D412, DIE C): 1624 psi (11.2 MPa minimum)

ELONGATION AT BREAK (ASTM D573): 454% minimum

For Your Project Specific Questions
T. 416.449.0049 | E. info@pliteq.com

© Pliteq Inc. 2018.


®™ Trademarks of Pliteq Inc. The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested application may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications. All listed dimensions are nominal.



www.pliteq.com

GENIECLIP® LB3


RESILIENT SOUND ISOLATION BRACKET



PATENTS: US 7,895,803 US 9,121,469 CA 2,552,516 AU 2,007,276,677 CN 101,631,919 EPO Patent Pending SG 149,449

TECHNICAL DATA CONTINUED

| | |
|--|---|
| TYPE A HARDNESS (ASTM D2240): | 37 durometer |
| DYNAMIC STIFFNESS (ASTM D5992, D4473, D4065): | 64.5 lbf/in (11.3 N/mm) |
| DYNAMIC-STATIC STIFFNESS RATIO (ASTM D5992, D4473, D4065): | 1.2 |
| LABORATORY SOUND TRANSMISSION CLASS (ASTM E90): | Specified wall or floor-ceiling assembly must be tested in a NVLAP-certified laboratory and comply with ASTM standards. |
| FIELD SOUND TRANSMISSION CLASS (ASTM E336): | Specified wall or floor-ceiling assembly must meet requirement as stated by building code and/or acoustical consultant. |
| TEMPERATURE STABILITY: | -40°F to +240°F (-40°C to +115°C) |

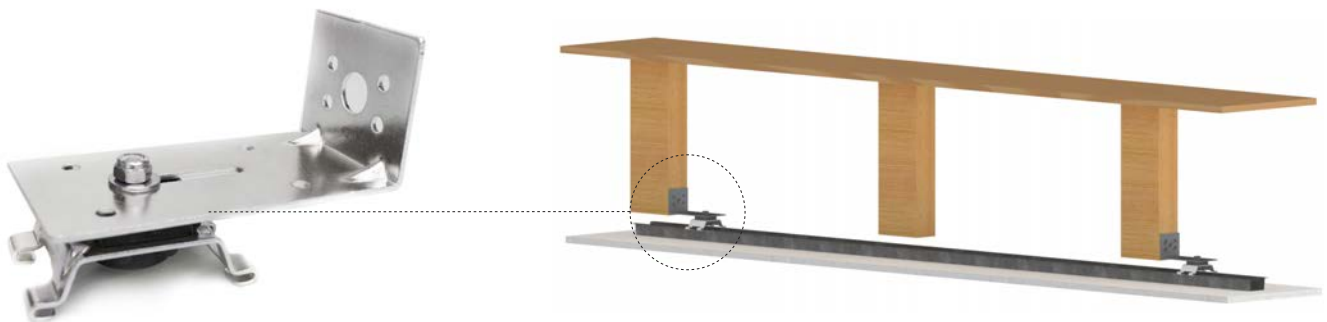

CONTACT US

For Your Project Specific Questions
T. 416.449.0049 | E. info@pliteq.com

© Pliteq Inc. 2018.

®™ Trademarks of Pliteq Inc. The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested application may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications. All listed dimensions are nominal.



www.pliteq.com



AROUND THE WORLD.

CONTACT US

PLITEQ NORTH AMERICA

131 Royal Group Crescent
Vaughan, ON
L4H 1X9 Canada

T. + 1 416 449 0049

info@pliteq.com
www.pliteq.com

PLITEQ UK

Irongate House
22-30 Dukes Place
London
EC3A 7LP

T. + 44 203 9846444

info@pliteq.co.uk
www.pliteq.co.uk

PLITEQ MIDDLE EAST

European Business Centre
Dubai Investment Park
PO Box 473 512
Dubai, UAE

T: +971 4 567 4944

info@pliteq.ae
www.pliteq.ae

PLITEQ ASIA PACIFIC

101 Cecil Street #19-13
Tong Eng Building Singapore
069533

T. +65 8452 6865

info@pliteq.sg
www.pliteq.sg



© Pliteq Inc.

®™ Trademarks of Pliteq Inc. The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested application may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications. All listed dimensions are nominal.